


REP-REP-RAE7031-3135005 Removing and installing/replacing push rod (stabiliser link) for left/right stabiliser; VIN: L424507

ISTA system version	4.01.21.17412	Data version	R4.01	Programming data	-
VIN	L424507	Vehicle	X'/E70/off-road vehicle/X5 xDrive50i/N63/AUTO/US/LL/2011/10		
Int.lev.works	-	Int.lev.(cur.)	-	Int.lev.(tar.)	-
Mileage	0 km				

31 35 005

Removing and installing/replacing push rod (stabiliser link) for left/right stabiliser

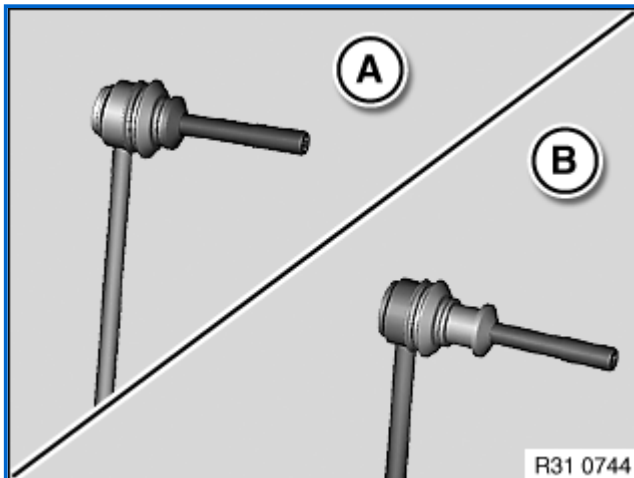

Important!

Observe [safety instructions](#) for raising the vehicle

Do not mix up anti-roll bar links



- A. Stabiliser link for conventional stabiliser
- B. Stabiliser link for active stabiliser

Slacken nut (1).

Installation:

Replace self-locking nut.

Tightening torque [31 35 2AZ](#).

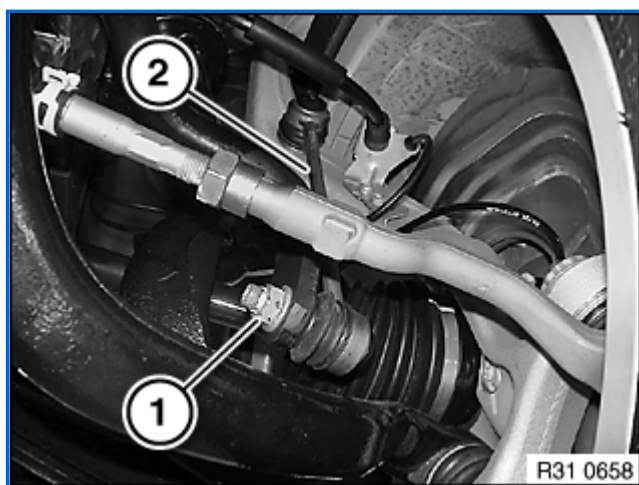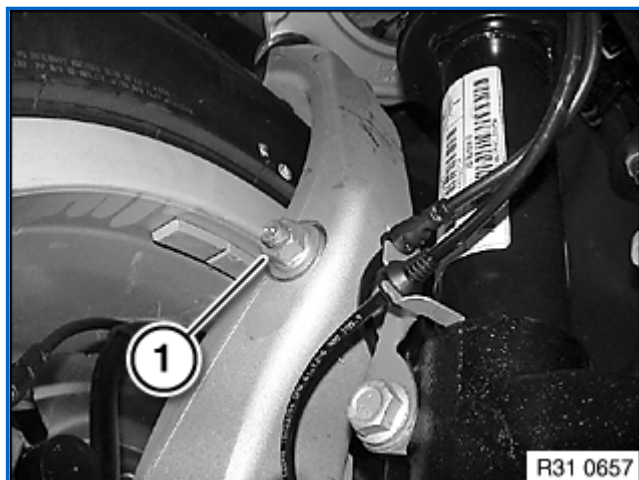

Slacken nut (1).

Remove stabiliser link (2).

Installation:

Replace self-locking nut.

Tightening torque [31 35 2AZ](#).